



SM... Aluminum Mounting Rail


0.0 Sheet thickness 0.0 mm

Information

Usage
Fixing PV panels to trapezoidal metal sheet, metal tiles sheets or corrugated metal sheets, e.g. DS-V6bN structure

Material
Aluminium (EN AW-6063)
Available finishes:
L- powder coating RAL9005

Additional information
Note:
The rail is not equipped with sealing rubber.
Using EPDMW2x40 Cellular Rubber is recommended.
Advantages:
- special groove (detail A in the picture) allows easy positioning of the screws when screwing in
- low height to allow for aesthetic installation of the panels close to the roof surface
For the assembly use min. 4 x SMDP6,0x25E Screws

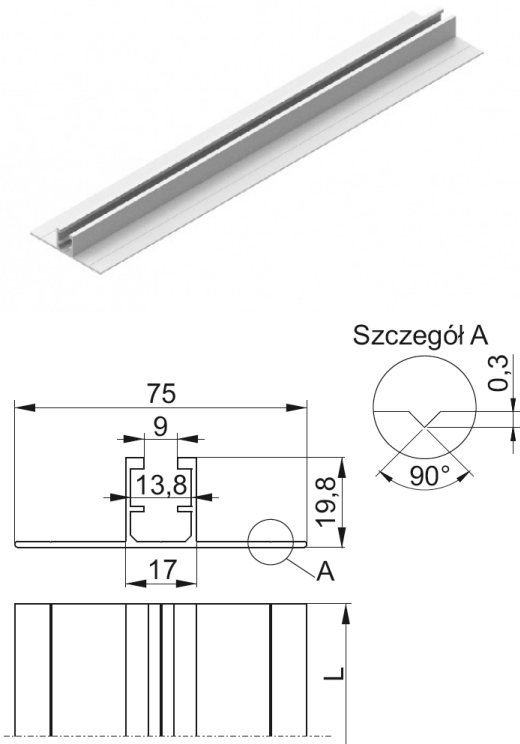

Product versions

Symbol	Catalogue number	Length L (mm)	Weight 1 pc. (kg)	Quantity (pcs.)
SM400	890040	400	0.25	50
SM6500	890046	6,500	4.08	50

Examples

