

Date tehnice pentru produs: NLK5U403--

Corp il sig K5 LED 3W 230VAC 3h 130Lm IP65 cu LED indicator

130lm, NiCd 3,6V/1,5Ah, inclusiv set pictograme



Fișe tehnice


Lungime (mm)	350,00
Lățime netă (mm)	117,00
Înălțime (mm)	60,00
Masă netă (kg.)	0,60
Tip iluminare	semn (corp) iluminat siguranță lampă de siguranță
EB-ZB	Self contained luminaire
Funcție	standard
Versiune	corp iluminat din plastic
Tip	K5
Fără halogen	Housing made of halogen-free plastic
Culoare	alb
Domeniu recunoaștere (m.)	20
Timp autonomie (h)	3

Fișe tehnice - Continuare


Sursă de lumină	LED
Lumen	130
Domeniul de tensiune (V)	230V AC 50Hz ±20%
Baterie (V/Ah)	3,2/1,5 LiFePO4
Grad de protecție	IP65
Montaj	Montaj de perete Montaj încastat în plafon universal
Temperatura minimă a mediului ambiant (°C)	0
Temperatura maximă a mediului ambiant (°C)	55

Desen dimensional: Corp il sig K5 LED 3W 230VAC 3h 130Lm IP65 cu LED indicator

NLK5...

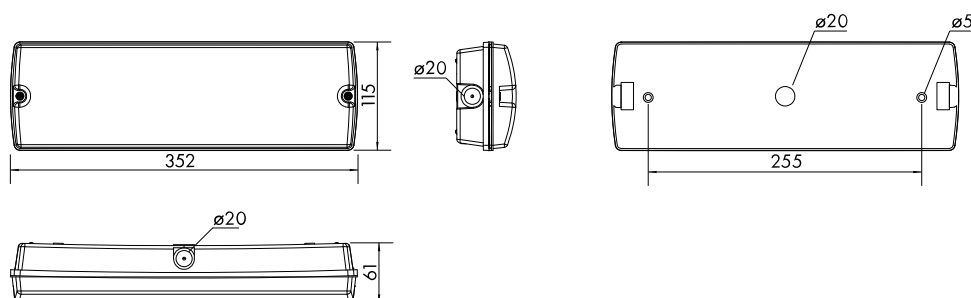

NLK5E...

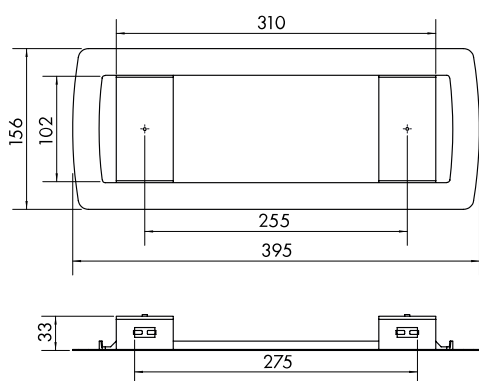

Tabel de date: Corp il sig K5 LED 3W 230VAC 3h 130Lm IP65 cu LED indicator

Montagehöhe [m]					
2,00	2,30	5,80	6,56	7,68	2,86
2,50	2,41	6,20	6,97	7,77	2,88
3,00	2,34	6,59	7,49	8,38	3,00
3,50	2,27	6,80	7,56	8,29	3,04
4,00	2,04	6,64	7,61	8,46	2,91

Tabel articole

Descriere	Cod comandă
Corp il sig K5 LED 3W 230VAC 3h 130Lm IP65 cu LED indicator 130lm, NiCd 3,6V/1,5Ah, inclusiv set pictograme	NLK5U403
Accesorii opționale	
Hanging sign ptr.C.il. Sig. K5 with pictogram set according to ISO7010 (arrow left, right, up, down and white foil for single side use), Viewing distance 25m	NLK5H2
Ramă de încadrare pentru corp il.sig. K5	NLK5E
Opal diffusor for emergency luminaires K5 with slide-in pictogram set according to ISO7010 (arrow left, right, up, down), viewing distance 30m	NLK5OPAL
Sticker pictogram set ptr.C.il. Sig. Design K5 according to ISO7010 (arrows left, right, up, down), viewing distance 20m	NLK5P
Accu LiFePO4 3,2V 1.5Ah for NLK4U403SC, NLK5U403--, NLK5U413SC, NLK6U423SC, LiFePO4 - Lithium-iron phoshpate battery , UN3480 - UN 3480 : NLAKKU321A Lithium-Ion batteries	