

205.W119-U*


Wall mounting box in halogen free plastic with
1 connector Type 2 32A 400Vac 22kW with cable



> FUNCTIONS

charge in mode 3 with pwm circuit pilot
energy metering and current consumption
power contactor aperture monitoring
remote control with smart-APP
working in mode stand-alone free
predisposition for serial communication
wireless connection to Wi-Fi home
POWER MANAGEMENT function embedded

> DIMENSION

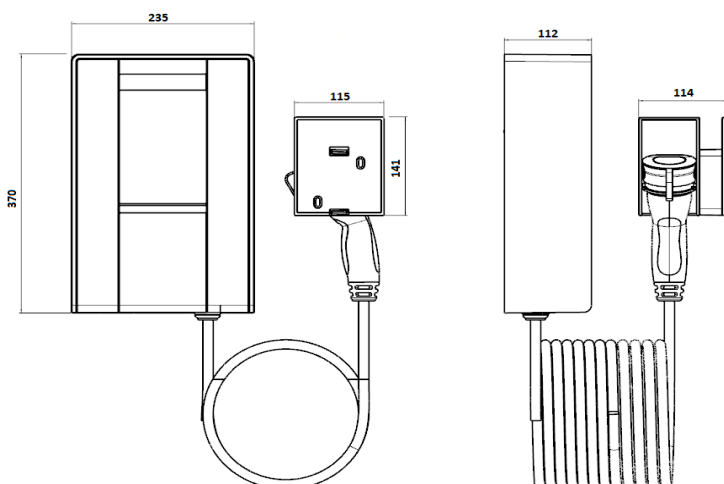

> REFERENCE STANDARD

IEC/EN 61851-1

Electric vehicle conductive charging system.
Part 1: General requirement.

IEC/EN 61439-7

Low-voltage switchgear and control gear assemblies.
Part 7: Assemblies for e.v. charging stations.

> TECHNICAL CHARACTERISTICS

Rated current:	32A
Rated voltage:	400Vac
Frequency:	50-60Hz
Insulating voltage:	500V
Protection degree:	IP55
Operating temperature:	-30°C +50°C
Material:	Engineering plastic
Glow wire test:	650°C
IK degree at 20°C:	IK08
Color:	Anthracite
Mounting	Wall mounting
Salt mist:	Resistant
UV radiation:	Resistant

> EQUIPMENTS

1 terminal strip 5x10mm2
1 digital energy meter 3P+N 80A
1 modular contactor 4P 40A 24Vdc
1 DC Leakage detector
1 fuse holder 1P+N gG 4A
1 power supply 24Vdc 36W
1 control card with Wi-Fi connection
1 RBG led stripes
1 cable holder in technopolymer
1 cable 5G6+1x0,5mm2 5m

excluded:

upstream protections (by the installer):
1 circuit breaker 3P+N C40 30mA ist. A
1 shunt trip release 24Vdc

*combination of the code material

Panel Graphics	
U	Scame Standard
UC	Custom